RClamp3624T RailClamp®

ESD Protection for uUSB Interfaces

PROTECTION PRODUCTS - RailClamp®

Description

RailClamp® TVS arrays are ultra low capacitance ESD protection devices designed to protect high speed data interfaces. This series has been specifically designed to protect sensitive components which are connected to data and transmission lines from overvoltage caused by **ESD** (electrostatic discharge), **CDE** (Cable Discharge Events), and **EFT** (electrical fast transients).

The RClamp®3624T is specifically designed to protect portable devices that utilize a uUSB port. The unique design of this device features low capacitance TVS diodes for protection of the USB data (DP, DM) and USB ID pins operating up to 5 volts. Loading capacitance on these lines is <1pF for maximum signal integrity. An integrated 28 volt TVS diode is used for protection of the USB voltage bus. This ensures the device will remain in a high-impedance state during normal USB operation or when the battery is being charged. Leakage current of the VBus protection is <250nA when operating at 28 volts.

The RClamp3624T is in a 6-pin SLP1710P4T package. It measures 1.7 x 1.0 x 0.40mm. The leads are spaced at a pitch of 0.4mm and are finished with lead-free NiPdAu. They may be used to meet the ESD immunity requirements of IEC 61000-4-2.

Features

- ◆ Transient protection for high-speed data lines to IEC 61000-4-2 (ESD) ±18kV (air), ±12kV (contact) IEC 61000-4-4 (EFT) 40A (5/50ns)
- Array of surge rated diodes with internal TVS Diode
- Small package saves board space
- Flow-Through design for easy layout
- Protects USB DP, DM, and ID Pin operating to 5V
- Protects USB VBus operating up to 28V
- ◆ Low capacitance (<1pF) on DP, DM, and ID Pins
- No insertion loss to 2.0GHz
- ◆ Low leakage current
- ◆ Low clamping voltage
- Solid-state silicon-avalanche technology


Mechanical Characteristics

- ◆ SLP1710P4T 6L package
- Pb-Free, Halogen Free, RoHS/WEEE Compliant
- ♦ Nominal Dimensions: 1.7 x 1.0 x 0.40 mm
- ◆ Lead Finish: NiPdAu
- Molding compound flammability rating: UL 94V-0
- Marking : Marking code
- Packaging : Tape and Reel


Applications

- ◆ USB 2.0
- USB OTG

Circuit Diagram

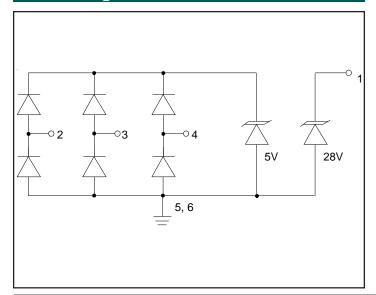

PIN Configuration

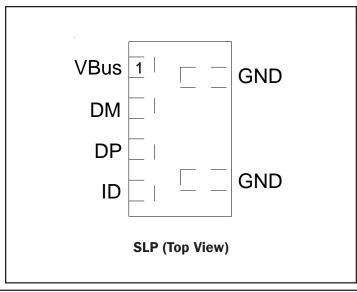



Absolute Maximum Rating

| Rating | Symbol | Value | Units | |
|--|------------------|-------------|-------|--|
| DP, DM, USB ID (Pins 2, 3, 4) | | | | |
| Peak Pulse Power (tp = 8/20μs) | P_{pk} | 100 | Watts | |
| Peak Pulse Current (tp = 8/20μs) | I _{PP} | 6 | А | |
| ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact) | V_{ESD} | ±18 ±12 | kV | |
| Operating Temperature | T, | -55 to +125 | °C | |
| Storage Temperature | T _{STG} | -55 to +150 | °C | |
| VBus (Pin 1) | | | | |
| Peak Pulse Power (tp = 8/20µs) | P _{pk} | 500 | Watts | |
| Peak Pulse Current (tp = 8/20μs) | I _{PP} | 8 | А | |
| ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact) | V_{ESD} | ±18 ±12 | kV | |
| Operating Temperature | T, | -55 to +125 | °C | |
| Storage Temperature | T _{STG} | -55 to +150 | °C | |



Electrical Characteristics (T = 25°C)

DM, DP, USB ID (Pins 2, 3, 4)

| Parameter | Symbol | Conditions | Minimum | Typical | Maximum | Units | |
|---------------------------|------------------|--|---------|---------|---------|-------|--|
| Reverse Stand-Off Voltage | V _{RWM} | Pin 2, 3, or 4 to GND | | | 5 | V | |
| Reverse Breakdown Voltage | V _{BR} | I _t = 1mA, Pin 2, 3, or 4 to GND | 6.5 | 8 | 11 | V | |
| Reverse Leakage Current | I _R | V _{RWM} = 5.0V, Pin 2, 3, or 4 to GND | | 0.005 | 0.100 | μΑ | |
| Forward Voltage | V _F | I _s = 15mA Pin 2, 3, or 4 to GND | 0.6 | | 1.2 | V | |
| Clamping Voltage | V _c | I _{pp} = 1A, tp = 8/20μs Pin 2, 3, or 4 to GND | | | 12 | V | |
| Clamping Voltage | V _c | I _{pp} = 5A, tp = 8/20μs Pin 2, 3, or 4 to GND | | | 15 | V | |
| Junction Capacitance | C _j | V _R = 0V, f = 1MHz, Pin 2, 3, or 4 to GND | | 0.7 | 0.80 | pF | |
| | | V _R = 0V, f = 1MHz, Between I/O pins | | | 0.4 | pF | |




Electrical Characteristics (T = 25°C)

VBus TVS (Pin 1) **Parameter** Symbol **Conditions Minimum Typical** Maximum Units Reverse Stand-Off Voltage V_{RWM} Pin 1 to GND 28 V_{BR} 32 36 40 ٧ Reverse Breakdown Voltage $I_{\star} = 1 \text{mA},$ Pin 1 to GND $V_{RWM} = 28V$ Pin 1 to GND Reverse Leakage Current I_R 0.250 μΑ Forward Voltage V_{F} $I_f = 10 \text{mA}$ 0.6 1.0 GND to Pin 1 Clamping Voltage V_{c} $I_{pp} = 1A$, tp = 8/20 μ s 45 ٧ Pin 1 to Ground $I_{pp} = 8A$, tp = 8/20 μ s 60 Clamping Voltage V_c Pin 1 to Ground C_{i} V_R = 0V, f = 1MHz Pin 1 to GND Junction Capacitance 75 рF




Typical Characteristics


Non-Repetitive Peak Pulse Power vs. Pulse Time (Data Lines - Pins 2, 3, 4 to GND)

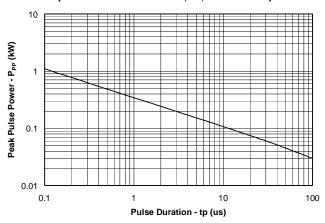


Clamping Voltage vs. Peak Pulse Current (Data Lines - Pins 2, 3, 4 to GND)

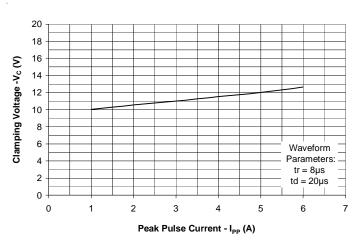


Normalized Capacitance vs. Reverse Voltage (Data Lines - Pins 2, 3, 4 to GND)

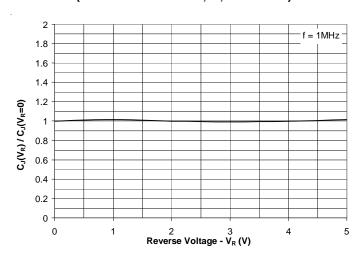


Pulse Waveform

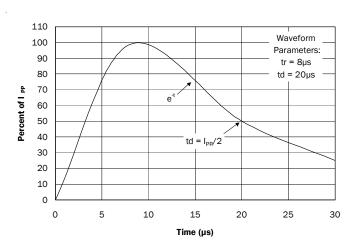

Clamping Voltage vs. Peak Pulse Current (VBus - Pin 1 to GND)

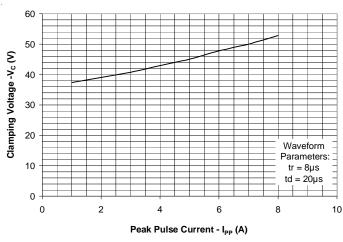


USB 2.0 Eye Pattern with RClamp3624T (Data Lines - Pin 2 and 3)

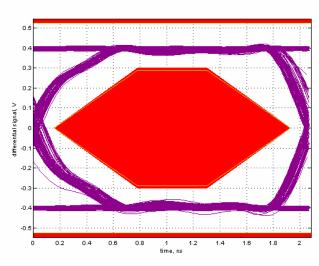




Typical Characteristics

Insertion Loss **S21** (Data Lines - Pins 2, 3, 4 to GND)

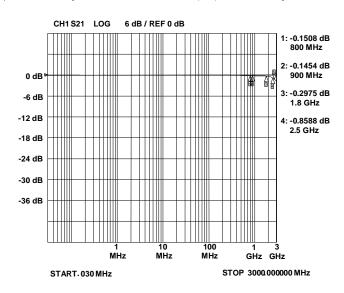


ESD Clamping (Pins 2, 3, 4 to GND) (8kV Contact per IEC 61000-4-2)

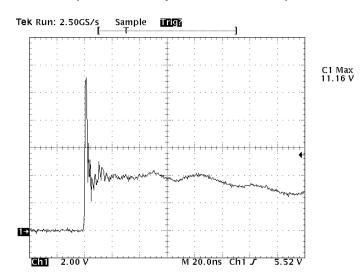


Note: Data is taken with a 10x attenuator

Analog Crosstalk

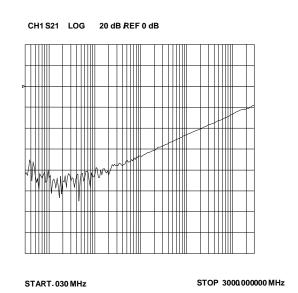

ESD Clamping (Pin 1 to GND) (8kV Contact per IEC 61000-4-2)

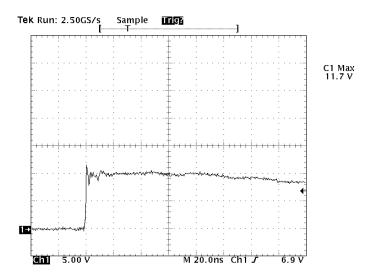

Note: Data is taken with a 10x attenuator



Applications Information

Device Connection and Layout Options for Protecting One USB Port

The RClamp3624T is optimized for protection of USB ports. Low capacitance protection is provided for the USB data (DM, DP) and USB ID pins. The maximum capacitance on these lines is <1pF for maximum signal integrity. USB Data and ID lines are connected at pins 2, 3, and 4. These inputs are referenced to an internal 5 volt TVS protection device. When the voltage on these lines exceed 5 volts, the TVS will conduct. Pin 1 is connected to the USB voltage bus (VBus). This device will conduct when the voltage on the bus exceeds 28 volts. Ground is provided at pins 5 and 6. Note that it is not necessary to connect both ground pins of the device as both are connected internally. Multiple micro vias connected to ground are recommended for best ESD performance. This will reduce parasitic inductance in the ground path and minimize the clamping voltage seen by the protected device. The package is designed for easy trace routing as shown in Figure 2. In this example, the VBus pin is connected to the voltage layer of the PCB with a micro via. Connection to ground is made at pin 6 using two micro vias. Connection to the ID pin is shown, however if the application does not utilize the ID function, pin 4 can be left not connected.

Figure 1- Pin Configuration






Figure 2 - Layout Example



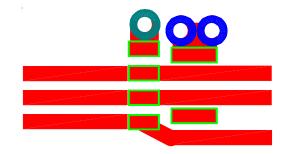

Outline Drawing - SLP1710P4T

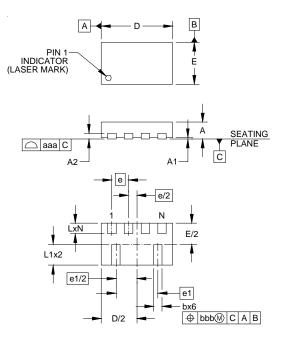


| DIMENSIONS | | | | | | | |
|------------|------|----------|------|--|--|--|--|
| DIM | MILL | IMET | ERS | | | | |
| ווועו | MIN | NOM | MAX | | | | |
| Α | 0.37 | 0.40 | 0.43 | | | | |
| Α1 | 0.00 | 0.02 | 0.05 | | | | |
| A2 | | (0.13) | | | | | |
| b | 0.15 | 0.20 | 0.25 | | | | |
| D | 1.65 | 1.70 | 1.78 | | | | |
| Е | 0.95 | 1.00 | 1.08 | | | | |
| е | 0 | 0.40 BSC | | | | | |
| e1 | 1 | .00 B | SC | | | | |
| Г | 0.20 | 0.25 | 0.30 | | | | |
| L1 | 0.45 | 0.50 | 0.55 | | | | |
| N | 4 | | | | | | |
| aaa | 0.08 | | | | | | |
| bbb | 0.10 | | | | | | |

NOTES:

- 1. CONTROLLING DIMENSIONS ARE IN MILLIMETERS (ANGLES IN DEGREES).
- 2. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

Land Pattern - SLP1710P4T



| DIMENSIONS | | | | | | |
|------------|-------------|--|--|--|--|--|
| DIM | MILLIMETERS | | | | | |
| С | (0.825) | | | | | |
| G 0.25 | | | | | | |
| Р | 0.40 | | | | | |
| P1 | 1.00 | | | | | |
| Χ | 0.20 | | | | | |
| Υ | 0.45 | | | | | |
| Y1 | 0.70 | | | | | |
| Z 1.40 | | | | | | |

NOTES:

- 1. CONTROLLING DIMENSIONS ARE IN MILLIMETERS (ANGLES IN DEGREES).
- 2. THIS LAND PATTERN IS FOR REFERENCE PURPOSES ONLY. CONSULT YOUR MANUFACTURING GROUP TO ENSURE YOUR COMPANY'S MANUFACTURING GUIDELINES ARE MET.



Marking




Ordering Information


| Part Number | Lead Finish | Qty per Reel | Reel Size | |
|-----------------|----------------|-----------------|-----------|--|
| RClamp3624T.TCT | Pb Free | 3,000 | 7 Inch | |

RailClamp and RClamp are marks of Semtech Corporation

YYWW = Date Code

Tape and Reel Specification

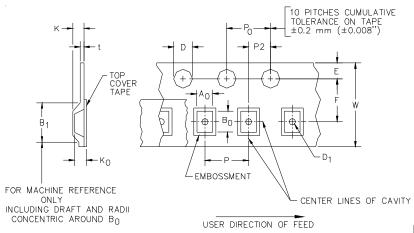



User Direction of feed

Device Orientation in Tape
Pin 1 in upper left towards sprocket holes

| A0 | ВО | ко | | |
|-----------------|-----------------|-----------------|--|--|
| 1.18 +/-0.05 mm | 1.88 +/-0.05 mm | 0.53 +/-0.05 mm | | |

| Tape Width | B, (Max) | D | D1 | E | F | K (MAX) | Р | PO | P2 | T(MAX) | W |
|---------------|----------|----------------------------|-----------------|-----------------|----------------|------------|---------------|---------------|----------------|--------|--------------------------------|
| 8 mm | 4.2 mm | 1.5 + 0.1 mm - 0.0 mm) | 0.5 mm ±0.05 | 1.750±.10 mm | 3.5±0.05 mm | 2.4 mm | 4.0±0.1 mm | 4.0±0.1 mm | 2.0±0.05 mm | 0.4 mm | 8.0 mm + 0.3 mm - 0.1 mm |

Contact Information

Semtech Corporation Protection Products Division 200 Flynn Rd., Camarillo, CA 93012 Phone: (805)498-2111 FAX (805)498-3804