

# **SPECIFICATION FOR LCD Module**

**Customer P/N:** 

Santek P/N: ST0280A2W-RSLW-F

DOC. Revision: RS01

| Customer Approval: |  |
|--------------------|--|
|                    |  |
|                    |  |
|                    |  |

|             | SIGNATURE  | DATE        |
|-------------|------------|-------------|
| PREPARED BY | Zhiyi Liao | 2017-05-23  |
| CHECKED BY  | Sam Liu    | 2017-05-23  |
| APPROVED BY | Natty Lee  | 2017-May-23 |



### Document Revision History

| Version | Revise Date | Description     | Changed by |
|---------|-------------|-----------------|------------|
| RS01    | 2017-05-23  | Initial release | Zhiyi Liao |
|         |             |                 |            |



### **Table of Contents**

| 1. GENERAL SPECIFICATION    | •••••• | 4    |
|-----------------------------|--------|------|
| 2. BLOCK DIAGRAM            | •••••• | 5    |
| 3. MECHANICAL DRAWING       |        | 6    |
| 4. INTERFACE ASSIGNMENT     |        | 7    |
| 5. ELECTRICAL SPECIFICATION |        | 8    |
| 6. OPTICAL CHARACTERISTICS  |        | . 14 |
| 7. RELIABILITY TESTS        |        | 18   |
| 8. RECAUTIONS               |        | 19   |
| 9 I IMITED WARRANTY         |        | 19   |



#### 1. GENERAL SPECIFICATION

#### 1.1 Description

The ST0280A2W-RSLW-F is a color active matrix Thin Film Transistor (TFT) Liquid Crystal Display (LCD) that uses amorphous silicon(a-Si) TFT as a switching device. This model is composed of a single 2.8 inches transmissive type main TFT-LCD panel. The resolution of the panel is 240 x 320 pixels and can display up to 262K color.

#### 1.2 Feature

- -TM type for main TFT-LCD panel
- -Structure COG+FPC+BL
- -Full, Normal (Still), Partial, Sleep, Standby mode are available

#### 1.3 Application

-Display terminals for cellular phone or equivalent.


#### 1.4 General Specification

| NI- | 14                       | Consistentian                     | L log!4           | Damark |
|-----|--------------------------|-----------------------------------|-------------------|--------|
| No. | Item                     | Specification                     | Unit              | Remark |
| 1   | LCD Size                 | 2.8                               | inch              | -      |
| 2   | Panel Type               | Panel Type a-Si TFT active matrix |                   | -      |
| 3   | Resolution               | 240 x (RGB) x 320                 | pixel             | -      |
| 4   | Display Mode             | Normally white, Transmissive      | -                 | -      |
| 5   | Display Number of Colors | 262K                              | -                 | -      |
| 6   | Viewing Direction        | 6 o'clock(Gray Scale)             | -                 | Note   |
| 7   | Contrast Ratio           | 500(TYP)                          | -                 | -      |
| 8   | Luminance                | 210(TYP)                          | cd/m <sup>2</sup> | -      |
| 9   | Module Size              | 50.00(W) x 69.20(L) x 2.40(T)     | mm                | Note   |
| 10  | Active Area              | 43.20(W) x 57.60(L)               | mm                | Note   |
| 11  | Pixel Pitch              | Pixel Pitch 0.180(W) x 0.180(L)   |                   | -      |
| 12  | Weight                   | -                                 | g                 | -      |
| 13  | Driver IC                | ST7789V                           | -                 | -      |
| 14  | Light Source             | 4 LEDs White                      | -                 | -      |
| 15  | Interface                | CPU 8/16bit                       | -                 | -      |
| 16  | Operating Temperature    | -20~70                            | $^{\circ}$        | -      |
| 17  | Storage Temperature      | Storage Temperature -30~80        |                   | -      |
|     |                          |                                   |                   |        |

Note: Please refer to the mechanical drawing.




#### 2. BLOCK DIAGRAM

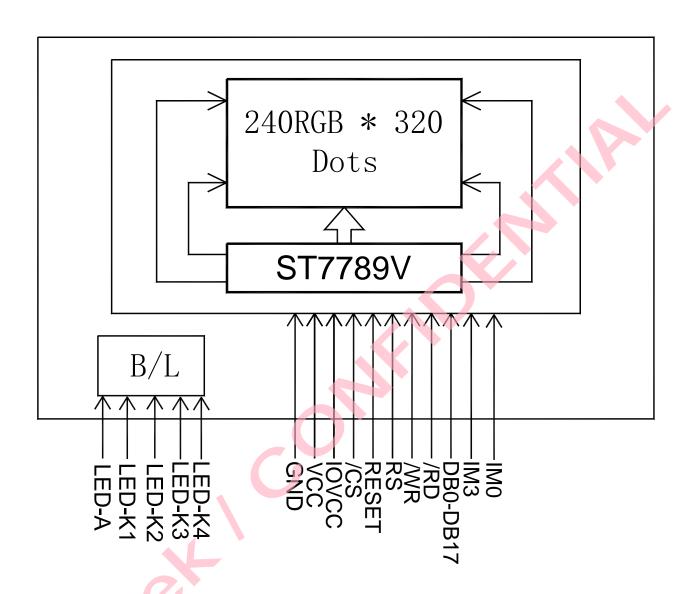



#### 3. MECHANICAL DRAWING

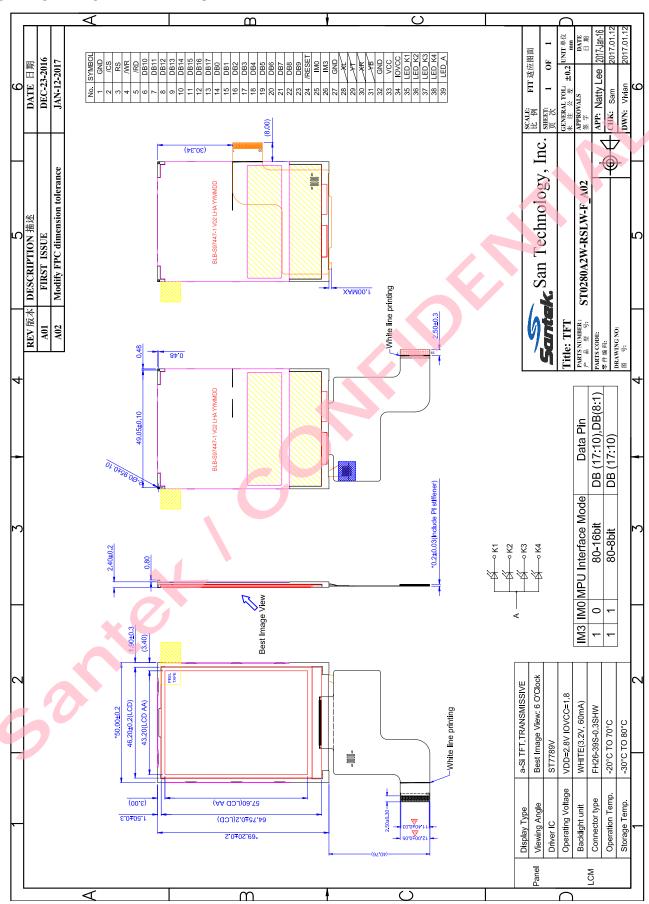

Page 6 of 19




### 4. INTERFACE ASSIGNMENT

| PIN<br>NO. | SYMBOL    | FUNCTION DESCRIPTIONS  |
|------------|-----------|--|
| 1          | GND       | Ground.  |
| 2          | /CS       | A chip selection signal. When CS is low,the chip can be accessed.  |
| 3          | RS        | Display data/command selection pin in MCU interface. RS='1': display data or parameter. RS='0': command data.        |
| 4          | /WR       | Serves as a write signal and writes data at the rising edge.   |
| 5          | /RD       | Serves as a read signal and read data at the rising edge.  |
| 6~13       | DB10-DB17 | Data bus.  |
| 14~23      | DB0-DB9   | Data bus.  |
| 24         | /RESET    | Reset pin.   |
| 25         | IMO       | MCU parallel interface type selection. IM3='1' and IM0='0': i80-system 16-bit interface. DB[17:10], DB[8:1] is used; |
| 26         | IM3       | IM3='1' and IM0='1': i80-system 8-bit interface. DB[17:10] is used;  |
| 27         | GND       | Ground.  |
| 28         | NC        | No connection  |
| 29         | NC        | No connection  |
| 30         | NC        | No connection  |
| 31         | NC        | No connection  |
| 32         | GND       | Ground.  |
| 33         | VCC       | Power supply to the analog circuit.  |
| 34         | IOVCC     | Power supply to the interface pins   |
| 35         | LED-K1    | Power supply for backlight (cathode).  |
| 36         | LED-K2    | Power supply for backlight (cathode).  |
| 37         | LED-K3    | Power supply for backlight (cathode).  |
| 38         | LED-K4    | Power supply for backlight (cathode).  |
| 39         | LED-A     | Power supply for backlight (anode).  |



### 5. ELECTRICAL SPECIFICATION

#### **5.1. APPLICATION CIRCUIT**

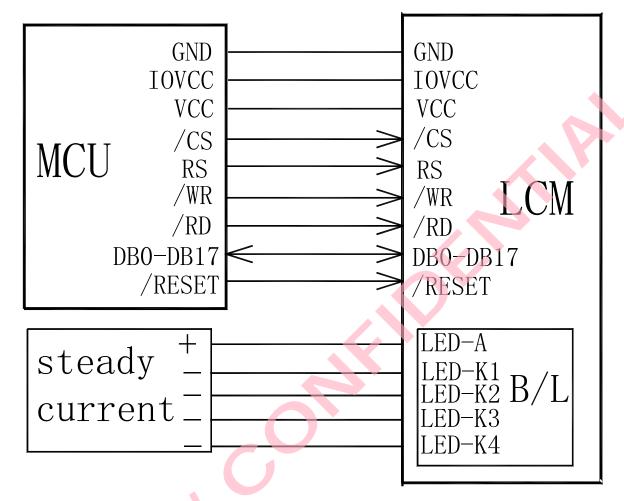

#### **5.2. ABSOLUTE MAXIMUM RATINGS**

| ITEM                        | CVMDOL  | CONDITION | STAN | UNIT |     |      |
|-----------------------------|---------|-----------|------|------|-----|------|
| I I EIVI                    | STWIDUL | CONDITION | MIN  | TYP  | MAX | UNII |
| Power Supply for Analog     | VCC     | Ta=25 °C  | -0.3 | -    | 4.6 | V    |
| Power Supply for Digital IO | IOVCC   | Ta=25 °C  | -0.3 | -    | 4.6 | V    |

Note: Permanent damage to the device may occur if maximum values are exceeded or reverse voltage is applied.

#### **5.3. TYPICAL OPERATION CONDITION**

#### 5.3.1 DC Characteristics

| ITEM                        | SYMBOL CONDITION   |                         | STAND     | UNI |           |    |
|-----------------------------|--------------------|-------------------------|-----------|-----|-----------|----|
| I I CIVI                    |                    |                         | MIN       | TYP | MAX       | Т  |
| Power Supply for Analog     | VCC                | Ta=25 oC                | 2.4       | 2.8 | 3.3       | V  |
| Power Supply for Digital IO | IOVCC              | Ta=25 °C                | 1.65      | 1.8 | 3.3       | V  |
| Input Signal "H" Level      | V <sub>IH</sub>    |                         | 0.7×IOVCC | -   | IOVCC     | V  |
| Input Signal "L" Level      | V <sub>IL</sub>    |                         | -0.3      | ı   | 0.3×IOVCC | V  |
| Output Signal "H" Level     | Vон                | I <sub>OH</sub> =-0.1mA | 0.8×IOVCC | ı   | -         | V  |
| Output Signal "L" Level     | V <sub>OL</sub>    | I <sub>OL</sub> =0.1mA  | -         | 1   | 0.2×IOVCC | V  |
| Frame Frequency             | f <sub>FRAME</sub> | -                       | 60        | 70  | 85        | Hz |

Note: To prevent IC latch up or DC operation in LCD panel, the power on/off sequence should follow the driver IC specification.

### 5.3.2 Current Consumption

| Item               | Symbol           | Val  | ues  | Unit  | Remark |
|--------------------|------------------|------|------|-------|--------|
| item               | Symbol           | Min. | Max. | Offic |        |
|                    |                  |      |      |       |        |
| Normal(Still) Mode | I <sub>CC1</sub> | -    | 10   | mA    | Note1  |
| Sleep Mode         | I <sub>CC2</sub> | -    | 100  | uA    | Note2  |

Note1: Test Condition

IOVCC=VCC=2.8V;

Display Pattern: All Pixel Black

Frame Rate=77Hz at Line Inversion

Operating Temperature: 25°C

Max. current check pattern:




**Black** 

Note2: In the standby mode, all the internal display operations are suspended including the internal R-C oscillator.

File No. 2017052301

#### **5.4. BACKLIGHT SPECIFICATION**

#### **5.4.1 BACKLIGHT CIRCUIT**

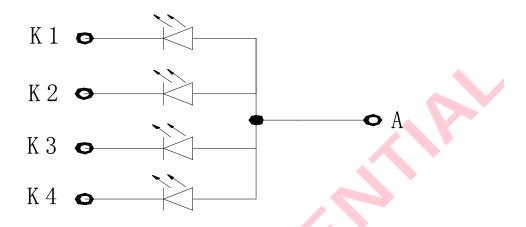

#### **5.4.2 ELECTRICAL CHARACTERISTICS**

(T=25℃)

| PARAMETER                     | SYMBOL   | CONDITION | STANDARD VALUE |     |     | UNIT  |
|-------------------------------|----------|-----------|----------------|-----|-----|-------|
| PARAMETER                     | STIVIBOL | CONDITION | MIN            | ТҮР | MAX | OINIT |
| FORWARD VOLTAGE (Single Chip) | VF       | IF=15mA   | 2.9            | 3.2 | 3.5 | V     |



#### 5.5. INTERFACE TIMING CHARACTERISTICS

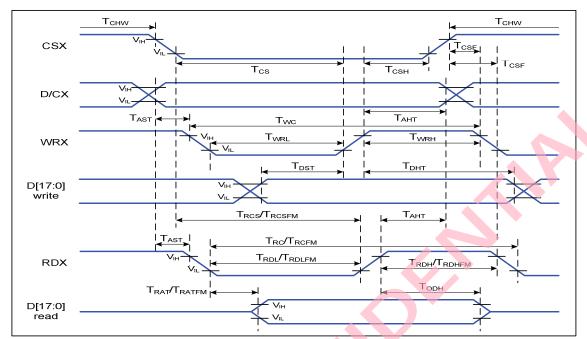


Figure 1 Parallel Interface Timing Characteristics (8080-Series MCU Interface)

VDDI=1.65 to 3.3V, VDD=2.4 to 3.3V, AGND=DGND=0V, Ta= -30 to 70  $^{\circ}$ C

| Signal           | Symbol             | Parameter                          | Min | Max | Unit | Description       |  |
|------------------|--------------------|------------------------------------|-----|-----|------|-------------------|--|
| D/CX             | T <sub>AST</sub>   | Address setup time                 | 0   |     | ns   |                   |  |
| T <sub>AHT</sub> |                    | Address hold time (Write/Read)     | 10  |     | ns   | -                 |  |
|                  | T <sub>CHW</sub>   | Chip select "H" pulse width        | 0   |     | ns   |                   |  |
|                  | T <sub>CS</sub>    | Chip select setup time (Write)     | 15  |     | ns   |                   |  |
| CSX              | T <sub>RCS</sub>   | Chip select setup time (Read ID)   | 45  |     | ns   |                   |  |
| CSA              | T <sub>RCSFM</sub> | Chip select setup time (Read FM)   | 355 |     | ns   | -                 |  |
|                  | T <sub>CSF</sub>   | Chip select wait time (Write/Read) | 10  |     | ns   |                   |  |
|                  | T <sub>CSH</sub>   | Chip select hold time              | 10  |     | ns   |                   |  |
|                  | T <sub>WC</sub>    | Write cycle                        | 66  |     | ns   |                   |  |
| WRX              | T <sub>WRH</sub>   | Control pulse "H" duration         | 15  |     | ns   |                   |  |
|                  | T <sub>WRL</sub>   | Control pulse "L" duration         | 15  |     | ns   |                   |  |
|                  | $T_RC$             | Read cycle (ID)                    | 160 |     | ns   |                   |  |
| RDX (ID)         | $T_{RDH}$          | Control pulse "H" duration (ID)    | 90  |     | ns   | When read ID data |  |
|                  | $T_{RDL}$          | Control pulse "L" duration (ID)    | 45  |     | ns   |                   |  |
| RDX              | T <sub>RCFM</sub>  | Read cycle (FM)                    | 450 |     | ns   | When read from    |  |
| (FM)             | $T_{RDHFM}$        | Control pulse "H" duration (FM)    | 90  |     | ns   | frame memory      |  |
| (1 101)          | T <sub>RDLFM</sub> | Control pulse "L" duration (FM)    | 355 |     | ns   | maine memory      |  |
| D[17:0]          | T <sub>DST</sub>   | Data setup time                    | 10  |     | ns   | For CL=30pF       |  |

#### 5.6. RESET TIMING CHARACTERISTICS

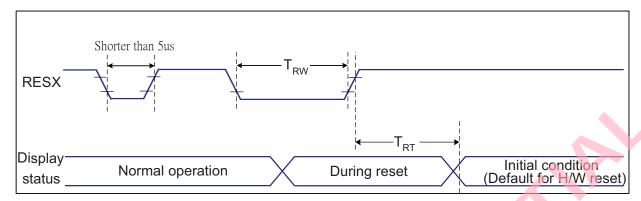


Figure 2 RESET TIMING

VDDI=1.65 to 3.3V, VDD=2.4 to 3.3V, AGND=DGND=0V, Ta=-30 ~ 70  $^{\circ}$ C


| Related Pins | Symbol           | Parameter            | MIN | MAX                | Unit |
|--------------|------------------|----------------------|-----|--------------------|------|
|              | TRW              | Reset pulse duration | 10  | -                  | us   |
| RESX T       | TDT              | Ponet appeal         | -   | 5 (Note 1, 5)      | ms   |
|              | TRT Reset cancel |                      |     | 120 (Note 1, 6, 7) | ms   |

#### Notes:

- 1. The reset cancel includes also required time for loading ID bytes, VCOM setting and other settings from NVM (or similar device) to registers. This loading is done every time when there is HW reset cancel time (tRT) within 5 ms after a rising edge of RESX.
  - 2. Spike due to an electrostatic discharge on RESX line does not cause irregular system reset according to the table below:

| RESX Pulse          | Action         |  |  |
|---------------------|----------------|--|--|
| Shorter than 5us    | Reset Rejected |  |  |
| Longer than 9us     | Reset          |  |  |
| Between 5us and 9us | Reset starts   |  |  |

- 3. During the Resetting period, the display will be blanked (The display is entering blanking sequence, which maximum time is 120 ms, when Reset Starts in Sleep Out –mode. The display remains the blank state in Sleep In –mode.) and then return to Default condition for Hardware Reset.
  - 4. Spike Rejection also applies during a valid reset pulse as shown below:

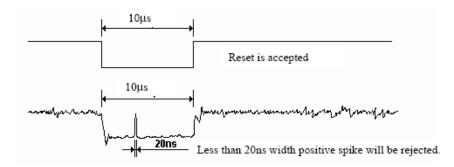

File No. 2017052301

#### 6. OPTICAL CHARACTERISTICS

 $(T_a=+25^{\circ}C,VCC=IOVCC=+2.8V,I_{BL}=80mA)$ 

| Item                               |         |                | Conditio         | Values |        |        |                   | _        |
|------------------------------------|---------|----------------|------------------|--------|--------|--------|-------------------|----------|
|                                    |         | Symbol         | n                | Min.   | Тур.   | Max.   | Unit              | Remark   |
| Viewing -<br>Angle -<br>Range -    | Left    | $\theta_{L}$   | - CR≧10          | -      | 45     | -      | degre<br>e        | Note 1,2 |
|                                    | Right   | $\theta_{R}$   |                  | -      | 45     | -      |                   |          |
|                                    | Тор     | Фт             |                  | -      | 50     | -      |                   |          |
|                                    | Bottom  | Фв             |                  | -      | 20     | -      |                   |          |
| Response Tir                       | ne      | Ton +Toff      | Normal<br>θ=Φ=0° | -      | 16     | -      | ms                | Note 2,3 |
| Contrast Ration                    | 0       | CR             | Normal<br>θ=Φ=0° | -      | 500    | -      |                   | Note 2,4 |
| Luminance                          |         | L              | Normal<br>θ=Φ=0° | 190    | 210    |        | cd/m <sup>2</sup> | Note 2,5 |
| Color<br>Chromaticity<br>(CIE1931) | White   | W <sub>x</sub> | Normal<br>θ=Φ=0° | 0.2460 | 0.2960 | 0.3460 | _                 | Note 2,6 |
|                                    | vvriite | $W_y$          |                  | 0.2663 | 0.3163 | 0.3663 |                   |          |
|                                    | Red     | R <sub>x</sub> |                  | 0.5797 | 0.6297 | 0.6797 |                   |          |
|                                    |         | Ry             |                  | 0.3016 | 0.3516 | 0.4216 |                   |          |
|                                    | Green   | Gx             |                  | 0.2939 | 0.3439 | 0.4039 |                   |          |
|                                    |         | Gy             |                  | 0.5523 | 0.6023 | 0.6523 |                   |          |
|                                    | Blue    | B <sub>x</sub> |                  | 0.0947 | 0.1447 | 0.1947 |                   |          |
|                                    |         | Ву             |                  | 0.0241 | 0.0741 | 0.1241 |                   |          |
| Color Gamut                        |         | NTSC           | CIE1931          | -      | 55.3   | -      | %                 | -        |
| Luminance<br>Uniformity            |         | UL             | Normal<br>θ=Φ=0° | 75     | 80     | -      | %                 | Note 2,7 |

#### Note 1: Definition of viewing angle range

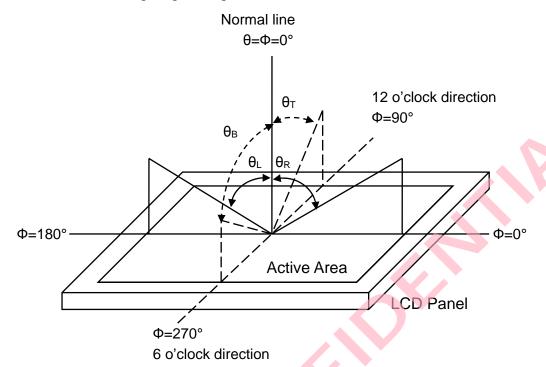


Fig. 1 Definition of viewing angle

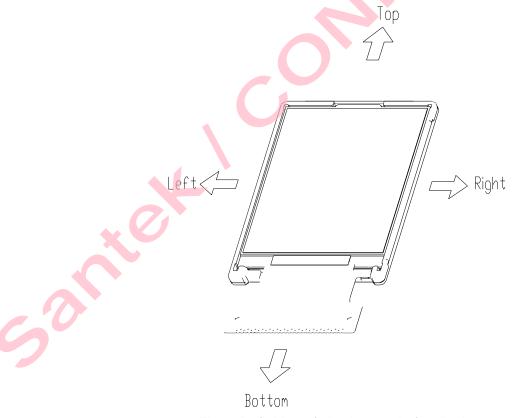


Fig. 2 Definition of viewing angle for display

#### Note 2: Definition of optical measurement system

The optical characteristics should be measured in a dark room with ambient temperature Ta=+25 °C . The optical properties are measured at the center point of the LCD screen after 5 minutes operation. (Equipment: Photo detector TOPCON BM-5AS Field of view: 1°/Height: 500mm.)

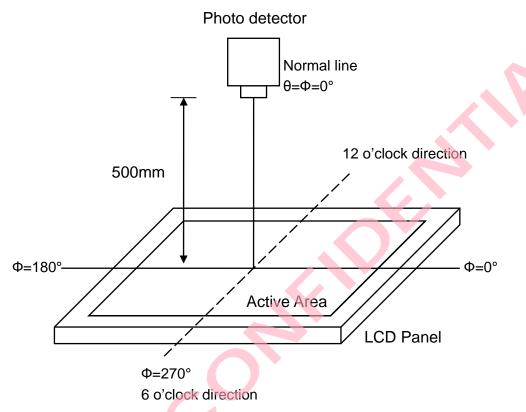


Fig. 3 Optical measurement system setup

#### Note 3: Definition of response time

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time ( $T_{on}$ ) is the time between photo detector output intensity changed from 90% to 10%, and fall time ( $T_{off}$ ) is the time between photo detector output intensity changed from 10% to 90%.

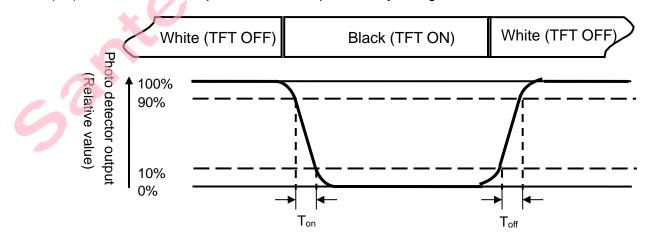


Fig. 4 Definition of response time



File No. 2017052301

Note 4: Definition of contrast ratio

Contrast ratio (CR) =  $\frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$ 

Note 5: Definition of luminance

Measured at the center area of the panel when LCD panel is driven at "white" state.

Note 6: Definition of color chromaticity (CIE1931)

Color coordinates measured at the center point of LCD when panel is driven at "White", "Red", "Green" and "Blue" state respectively.

Note 7: Definition of luminance uniformity

To test for uniformity, the tested area is divided into 3 rows and 3 columns. The measurement spot is placed at the center of each circle as below.

Luminance Uniformity  $(U_L) = \frac{L_{min}}{L_{max}}$ 

L-----Active area length W----- Active area width

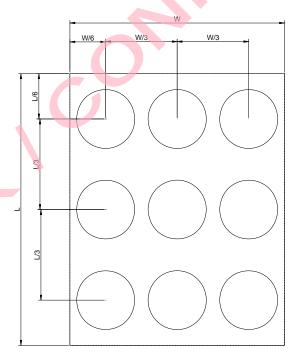


Fig. 5 Definition of luminance uniformity

 $L_{min}$ : The measured minimum luminance of all measurement position.

L<sub>max</sub>: The measured maximum luminance of all measurement position.

#### 7. RELIABILITY TESTS

| ITEM                       | CONDITION                               | CRITERION                                       |  |  |  |  |
|----------------------------|---|---|--|--|--|--|
| Operating Temperature Test | High Temperature: +70 °C±3°C, 72 hrs    | No defects in display and                       |  |  |  |  |
|                            | Low Temperature: -20 °C±3°C, 72 hrs     | operational functions                           |  |  |  |  |
| Storage Temperature Test   | High Temperature: +80 ℃±3℃, 120 hrs     | No defects in display and                       |  |  |  |  |
|                            | Low Temperature: -30 °C±3°C, 120 hrs    | operational functions                           |  |  |  |  |
| Humidity Endurance Test    | 60 °C±3°C, 90%±3%RH, 72 hrs             | No defects in display and operational functions |  |  |  |  |
| Thermal Shock Test         | -30 °C (30mins)∼                        | No defects in display and                       |  |  |  |  |
|                            | +80 °C (30mins) 10 cycles               | operational functions                           |  |  |  |  |
| Vibration Resistance Test  | Operating Time: thirty minutes          |   |  |  |  |  |
|                            | exposure for each direction (X,Y,Z)     | No defects in display and                       |  |  |  |  |
|                            | Sweep Frequency:10~55Hz (1 min)         | operational functions                           |  |  |  |  |
|                            | Amplitude: 1.5mm                        |   |  |  |  |  |
| Mechanical Shock           | 100G 6ms,±X, ±Y, ±Z 3 times for each    |   |  |  |  |  |
|                            | direction                               | operational functions                           |  |  |  |  |
| Electro Static Discharge   | $\pm$ 2KV, Human Body Mode, 100pF/1500Ω | No defects in display and operational functions |  |  |  |  |

#### NOTE:

- 1) The samples must be free from defect before test, must be restored at room condition at least for 2 hours after reliability test before any inspection.
  - 2) Before test the function of TP, the sample must be placed in room temperature for 24hrs after RA test.

File No. 2017052301

#### 8. PRECAUTIONS

#### 8.1. HANDLING

- 8.1.1. Polarizer Cleaning, Petroleum ether (or N-hexane) is recommended for cleaning the front/rear polarizers and reflectors, acetone, toluene and ethanol are not allowed to avoid damaging the surface.
- 8.1.2. Body grounding, must wear Anti-ESD wrist strap while pick up LCDs.
- 8.1.3. FPC Soldering, less than 300°C/3S, solder must be grounding on grounding bench.
- 8.1.4. If use electric Screwdriver to do assembly, screwdriver must be grounding.

#### 8.2. STORAGE

- 8.2.1. Keep in a sealed polyethylene bag.
- 8.2.2. Keep in a dark place.
- 8.2.3. Keep in temperature between  $0^{\circ}$ C and  $35^{\circ}$ C.

NOT allowed at 70°C for more than 160 Hours, or at -20°C for more than 48 Hrs.

#### **8.3. SAFETY**

If liquid crystal leak out of a damaged glass cell, DO NOT put it in your mouth or touch eyes, if the liquid crystal touch your skin or clothes, please wash it off immediately using soap and water.

#### 9. LIMITED WARRANTY

Unless otherwise agreed between San Technology and customer, San Technology will replace or repair any of its LCD modules which are found to be functionally defective when inspected in accordance with San Technology LCD acceptance standards (copies available upon request) for a period of one year from date of shipments. Cosmetic/visual defectsover specs must be returned to San Technology within 30 days of shipment. Confirmation of such date shall be based on freight documents. The warranty liability of San technology limited to repair and/or replacement on the terms set forth above. San Technology shall not be responsible for any subsequent or consequential events.

#### 9.1. RETURNING LCM UNDER WARRANTY – TERMS AND CONDITIONS

- 9.1.1. No warranty can be granted if the precautions stated above have been disregarded. The typical examples of violations are :
  - Broken LCD glass.
  - Circuit modified in any way, including addition of components.
- 9.1.2 Module repairs will be invoiced to the customer upon mutual agreement. Modules must be returned with sufficient description of the failures or defects. Any connectors or cable installed by the customer must be removed completely without damaging the PCB's eyelet, conductors and terminals.